

IDEAL AND REAL SYSTEMS:

A Study of Notions of Control in Undergraduates Who Design Robots

FRED G. MARTIN

1. Introduction

This paper presents a study of MIT undergraduate students' notions of control as embodied in the task of designing autonomous robots that perform in a competitive event. These robots were built by students who participated in the *LEGO Robot Design Competition*, a hands-on, workshop-like course that takes place every January at MIT.¹

In the course, students are given a kit of parts with which to build their robots. The kits include a custom microprocessor board for control of the robot, LEGO TECHNIC gears, beams, axles, and bricks for the structural work, and assorted electronic components for building sensors and other related parts. In addition to this specially-designed robot-building kit, students are given the specifications for a competitive task to be performed by their robot. The job of the students, then, is to learn how to use the materials in their kits through the process of designing, constructing, and debugging a robot of their

Fred Martin

own conception. At the end of the four-week course, the students' robots compete in a public event which draws an audience of several hundred people, including MIT students and faculty, local parents and their children—who all become excited robotic enthusiasts for the event.

The pedagogy of the Robot Design project is based on the educational theory of *constructionism* espoused by Seymour Papert (Papert, 1986). According to constructionist learning theory, people learn most effectively when they are involved in the creation of an external artifact in the world. This artifact becomes an “object to think with,” which is used by the learner to explore and embody ideas related to the topic of inquiry.

For the purposes of the Robot Design project, constructionism is reflected in the centrality of the students' robot-design task. The entire course revolves around this challenge. Traditional academic mechanisms of lectures and recitation are used, but are subordinated to the practical work of getting the robots built and debugged. The most valuable interventions made by the course organizers on behalf of its students occur not in the classroom, but in the ever-present laboratory sessions. Additionally, students use each other as resources (they work in small teams).

This paper has three sections. The first section presents a case study of a pair of students who formed a team to build robots for two consecutive years of the Robot Design class. These students believed that control could best be achieved by having the robot keep track of its global position on the playing field at all times. Even in the face of failure, these two students held their views with conviction; only after repeated problems did one of them revise his beliefs.

The second section presents an overview of the task of designing a control system for

Ideal And Real Systems

a contest robot, and the sort of ideas that students generate when devising their own solutions. This section presents a composite set of results from a number of different students' work; this composite portrait is representative of the sorts of issues encountered by most of the students in the classes.

The methodologies chosen by the student robot designers in this study are in many ways a product of the curriculum of the modern engineering university. The final section analyzes the content of this curriculum, suggesting possible explanations for students' choices and why their intuitions about control were often misleading. In doing so, I point toward a direction for revising the curriculum to encompass a broader range of ideas about systems and control—one that would be more effective in preparing students for demands of modern technological systems.

2. Case Study: Positioning as a Control Principle

In this section, I present an in-depth case study of one particular team of students. This case study serves both to introduce the Robot Design project, and to illustrate the strong personal convictions brought to the project by the particular students in question. Even after their approach proved unsuccessful, these two students remained quite attached to their ideas about what type of control system would be best for operating their robot—an indication of the strength of their beliefs. In the subsequent section, I will examine ways that students negotiate issues of control in a broader sense.

The students, whom I will call "Stan" and "Dave," participated in robot-building teams for two consecutive years of the contest (1990 and 1991). While all members of the team collaborated on the implementation of each robot, Stan and Dave's strategic ideas dominated the designs. (Their team had other members as well during each of the

Fred Martin

two years.)

Stan was a master LEGO Technic builder, having been a avid fan and collector of the materials since his childhood and through his teenage years. His ability to design with the materials was quite impressive in both artistic and functional senses. He also was driven to create spectacular and elaborate designs that would have great audience appeal.

Dave, on the other hand, was an accomplished computer programmer, who reveled in building sophisticated and elegant computer programs. Both Stan and Dave were pleased to defer to each other's strengths during implementation of their ideas, but collaborated during the conceptual design stages.

In the first of these contests, entitled *Robo-Pong*, the goal was to transport ping-pong balls onto the other robot's side of the table. Stan and Dave chose to build a shooter robot. The task of building an effective shooting mechanism was a genuine challenge even for the experienced LEGO designer; there were a number of teams who gave up on building shooting robots after being unsuccessful in developing working firing mechanisms. Stan was undaunted and built a firing mechanism that was far better than any of the others, shooting the balls further and recocking quicker.

But the ball firing mechanism is only half of a shooter robot; the other half is a mechanism to feed the balls into the barrel of the shooter. For this Stan ended up adopting a mechanism that was suggested to him by another team developing a shooter robot (he obtained their permission before developing his own version of their idea). The result was a robot that was quite competent at scooping up and firing balls—or so it seemed, when they operated the robot under direct human control.

When Stan and Dave approached the control problem, they made the assessment

Ideal And Real Systems

that the feedback control methods we were proposing for overall robot guidance were too error-prone and ambiguous. According to them, robots that used local feedback from the environment were inclined to wander and make missteps on their way to the feedback goal. Stan and Dave didn't trust local feedback as the most effective or reliable way to accomplish the task.

Instead, their approach was based on two unusual sensor applications. The first was a method to ascertain the robot's initial orientation on the playing table (*Robo-Pong* used a randomized angle of initial robot orientation). The second was a mechanism that was intended to keep track of the robot's position on the playing table in terms of a displacement from its initial position. Thus, by knowing the initial orientation and by recording all changes from it, they expected their robot to be able to navigate about the table at will, knowing its exact location at all times. Surely, they believed, this would be a more effective approach than relying on erratic data sampled as the robot wandered about the playing surface.

The primary sensor provided in the *Robo-Pong* robot-building kit for detecting inclination was the mercury switch. However, the kit included an alternate inclination sensor, which we had not tested but could potentially operate more effectively than the mercury switches. The device was a small metal can, larger than a pencil eraser but smaller than a thimble, which contained a tiny metal ball. The can's base was flat and four wires protruded down from it. Inside the can, the four wires terminated in distinct contact areas. In operation, the ball rolled around inside the can and created an electrical contact between the inner wall of the can and one (or two) of the four contact areas.

We did not rely on the metal can sensor as the primary inclination-sensing device because we were unsure of how pronounced a contact bounce problem due to vibration

Fred Martin

would be. Because the sensor was quite cheap, though, we decided to provide them anyway, buying enough to give two to each *Robo-Pong* team in addition to four mercury switches. We left the testing and evaluation of the device to the participants.

It turned out that the bounce problem with the metal can was indeed troublesome compared to the mercury sensors, so most participants used the mercury switches. Stan and Dave, however, thought of an unusual use for the metal can sensors. Because the robots were to start the contest on the inclined surface, robots could use inclination sensors to determine their initial angle of approach up the slant of the incline. The bounce problem would be eliminated since the robot would be at rest at the start of the round.

Because the initial orientation was specified in thirty degree increments, there were in principle twelve discrete initial orientations. Stan and Dave realized that by using three metal can sensors (each of which gave an inclination reading accurate to one of four quadrants), rotated by thirty degrees with respect to one another, their robot could *precisely determine* its initial orientation. This precision would be necessary to combine with the other component of their strategy, a movement controller.

The movement controller was a method to enable the robot to keep precise track of its position as it navigated across the playing surface (finding its way from the starting position to the trough, for example). For this, Stan and Dave employed *shaft encoders*, a sensor technology for measuring the angular rotation of a shaft.

Shaft encoders are typically employed in mechanical devices in which angular travel or displacement is confined within limits and hence can be repeatably measured. For example, a shaft encoder on a joint of a revolute robot arm (an arm with elbow-like joints) can measure the angle of the arm. Usually such encoders are used in conjunction with limit switches; to calibrate the joint for sensing, the controller will drive the joint until it

Ideal And Real Systems

triggers the limit switch, thereby determining the zero position of the joint. All subsequent readings are then made with respect to the zero position, which can be reliably re-established at a later time.

For mobile applications, shaft encoders have questionable value in determining position, because of the problem of a vehicle's wheels slipping with respect to the surface on which it is moving. This slippage causes errors in estimations of where the vehicle has moved on the surface. In mobile applications, shaft encoders are best suited for velocity and approximate distance measures; the speedometer/odometer of an automobile is an example of this usage.

Stan and Dave were cognizant of the slippage problem, but believed they had a workaround solution that would yield acceptable results. Rather than attaching the shaft encoders to the drive wheels, which they did realize would be quite prone to slippage, they added free-spinning *trailer wheels* that would rotate when dragged along the driving surface by the robot's movement from the drive mechanism. They attached the shaft encoders to the trailer wheels, which presumably were much less prone to slippage than the drive wheels.

Stan described the plan to me during early stages of his implementation. I argued with him that the approach was dubious; mobile robotics researchers had built various robots that attempted to perform global positioning based on shaft encoding, and they all had shortcomings that forced the robots to frequently recalibrate their estimates of position based on local environmental references. He was undeterred. Since I did not perceive my role as preventing him from exploring an idea that he was interested in, and there was no harm in his trying it, I backed off.

Stan and Dave proceeded with the concept; Dave performed much of the program-

Fred Martin

ming. At various points during the development of the robot they were able to make remarkable demonstrations of the robot's ability to respond to control commands and measure and correct for its motion. The robot could drive to specific commanded positions; or, if the robot were dragged along a table to a position eight or ten inches away and then released, the position controller would drive the robot back to within an inch of its original position. Of course this only worked when the robot was dragged with considerable downward pressure so that the trailer wheels tracked the movement (i.e., they did not slip). I tried to argue with Stan that as impressive as this demonstration was, the approach was still futile because displacements in game play would be of the sort that *would* cause slippage. I think at this point Stan was so pleased with his apparent success that he was not listening to me.

The robot's overall strategy was to drive down into the bottom of its side of the table and sweep back and forth along the trough, firing balls over to the opponent's side. If the robot's initial orientation were such that it was aimed upward, it would drive forward to knock one of the three top balls over the edge, as an "insurance" measure, before retreating into its main activity in the trough.

During the testing, Stan and Dave maintained confidence in their design. Indeed, the robot seemed to largely work; often it would only require minor hand-administered nudges during practice rounds to be successful. In the actual contest, however, the design failed badly. The slightest deviation from ideal circumstances caused the robot to fail without possibility for recovery. In ignoring feedback from the specific features of the playing field, the robot really had no hope if any number of things were to go wrong: a slight miscalculation as to the amount of rotation needed to orient properly, a bump from the opponent robot, or a even an irregularity in the surface of the playing field. Stan

Ideal And Real Systems

and Dave had fooled themselves during the robot testing—when the safety net of their prodding corrections was gone, the robot could not reliably perform the sequence of steps needed to work, and it was a competitive failure.

Stan and Dave teamed up again to design a robot for the subsequent *Robo-Cup* contest. In his first written report for that project, Stan reflected on his experiences in building the *Robo-Pong* robot:²

Lessons Learned. Last year we spent a lot of time and resources on non-essentials. Our mechanical design was not stabilized until the night before the second contest. The majority of the time spent on software was in building a sophisticated object-oriented system. Our strategy was stable early enough, but it relied too heavily on unproven sensors and the accuracy of shaft encoders. This year we are focusing our energy on creating a robot that works well, even if we don't have time to make it look good.

Design Goals. In the past, robots have often failed because one particular sensor is critical and the software doesn't handle exceptions and breakdowns very well. Our goal is to build a robot that can check for errors and compensate before the errors escalate. Reliability and robustness are the targets for our project. Given enough time for testing, most unexpected conditions can be accounted for.

It seemed as if Stan had learned his lesson. Yet, remarkably, Stan and Dave proceeded to repeat exactly the same mistakes in their *Robo-Cup* robot design.

While Dave did not attempt to build as sophisticated a global positioning system, Stan and Dave did again employ shaft encoders as the primary sensor for their *Robo-Cup* design. In *Robo-Cup*, the contest task involved driving from the starting position to a

Fred Martin

ball dispenser, actuating the ball dispenser's control button (causing balls to drop from above), and delivering the balls to a soccer-like goal. Not surprisingly, Stan and Dave chose to shoot the balls in, reducing their robot's task to the job of successfully moving from the starting position to a location beneath the ball dispenser, from where balls could be shot directly into the goal area.

Stan and Dave's insistence on using the shaft encoders to guide their robot's movement from the starting position to the ball dispenser caused them to ignore an obvious alternative solution: a reflectivity coding on the playing surface which could have been used to indicate to the robot the position of the ball dispenser. They claimed that their robot moved too fast to be able to stop in time after detecting this feature.

In this year, one of their troubles was gone: rather than robots being subject to a random orientation at the start of the contest, they could be placed within the designated starting circle at any orientation by the robot's own designers. Knowing that an exact measure of initial position was critical to his robot's success, Stan requested permission to allow the use of a template that he could employ to help position his robot repeatably at the same location! We consented.

Their robot's performance in the actual contest was disappointing. Stan and Dave were not able to tune the performance of the shaft encoders to be consistent. The night of the contest, the robot would stop its journey to the ball dispenser just about an inch short of the desired position, lock itself to the wall, and proceed to fire balls that would miss their target for the rest of the round. The location at which it would anchor itself was just at the threshold of being able to trigger the ball dispenser at all; in one round it was not even able to do so, and spent the bulk of the round in futile attempts to strike the panel that would dispense the balls.

There is a short coda to this story. Beginning with the earlier *Robo-Puck* contest, we ran rematch competitions at the Boston Computer Museum each year, taking place several months after the date of the MIT contest. Stan rebuilt his robot from the ground up for the *Robo-Cup* rematch, this time using a strategy based on feedback from the playing field features rather than from shaft encoders. His efforts were rewarded: though Stan's robot didn't win the overall competition, it did win one round—Stan's first competitive victory in two years of robot-building. In rebuilding his robot with the design principle of reacting directly with environmental features, Stan achieved success.

2 Robotic Control

The data for the issues discussed in this section is taken primarily from the students' work in the *Robo-Pong* contest, which took place in 1991, and the *Robo-Cup* contest, which took place in 1992. As mentioned, the task in the *Robo-Pong* contest was to transport ping-pong balls onto the other robot's side of a rectangular playing field. The field was inclined so that once balls were pushed over a center plateau, they would roll onto the opponent's side.

In the *Robo-Cup* contest, robots were required to draw balls from a vertically-mounted ball dispenser, and then transport the balls into a soccer-like goal. The goal was divided horizontally into two halves; a ball delivered into the upper half of a goal would score three points, while a ball delivered into the lower half would score two points. (This point differential was created to encourage the design of robots that placed or fired balls into the upper portion of the goal, rather than rolling them into the lower portion.)

Fred Martin

2.1. The Omniscient Robot Fallacy

Students' beliefs in how a robotic system should be understood and controlled were revealed by their approach to the central task of developing their robot's strategy.

Some students approach the design of the robot strategy from what might be called an egocentric perspective, as if they were thinking, "what would I do if I were the robot." These students imagine themselves at the helm of their robot, driving it around the table and performing tasks. This approach leads to ideas like the ones in the following narrative:

Our strategy at present seems fairly well developed. First, [our robot] will immediately locate the other robot, roll over to it while lowering the forklift, and try to flip the other robot over. If it can knock it over, or even over the playing field wall, [our] robot has essentially won, as it can now freely place balls in the goal without interference. If this attempt fails after ten seconds or so, our robot will disengage, roll over to the ball dispenser, park, and get balls and shoot them at our goal with a cannon mechanism. Should the cannon prove unreliable, we may have to collect balls and deliver them manually, but having a cannon would be much more nifty, and would avoid a lot of line- or wall-following difficulty.

It is apparent in this discussion that the student has not thought through, at a mechanistic level, the questions of how the robot might actually perform these tasks; he is imagining that it is simply a question of navigation as one might drive a car. These students use their human senses and mental faculties for thinking about the robot control problem. The difficulty arises because robot sensors are extremely primitive, and robots don't have a bird's-eye view of their situation.

Ideal And Real Systems

Many students initially generated such fantastic ideas about what sorts of activities their robot might be able to perform. Here is another student's ideas about how to solve a contest:

I played around with a structure that was to be the "Goal Emulation Unit," which was an idea of mine. We had decided it would be a neat strategy to have something on our robot that looked like a goal, so that it could stand in front of the opponent's goal, and hopefully the opponent would place its balls into our robot's unit... We had decided in the beginning that we wanted a fast robot. I thought it might be neat to chase after our opponent as soon as the round started and either steal his ball (assuming that it goes to the dispenser first) by pushing him out of the way, or having some sort of long arm that reached above the other robot to get the ball.

Written at the end of the second week of the project, this and the previous scenario is representative of students who have difficulty imagining what sort of information the robot will be working with, and hence what sort of strategies or algorithms will yield realistic performance results.

Quite a large number of students initially generated ideas like these. If an idea required a complex mechanical structure, such as the "Goal Emulation Unit" described in the previous passage, students discarded their ideas as soon as they were unable to build the mechanisms required to accomplish them (which was typically early in the project). If the complexity resided in the software design, however, many students continued to imagine their robot to be capable, in principle, of very sophisticated behaviors—until they attempted to implement those behaviors in actual code. For example, in

Fred Martin

the following comment, a student believed his robot to be all but completed, even though he has not begun to write its control program:

As my team's robot stands now, it is 99% near completion. Only a few structural changes (might) have to be made and one or two sensors have to be attached; otherwise all that is left to do is program the baby.

Evidently, this student is not including the programming task in his estimate of the robot's percentage of completion. This attitude is typical; not only do students consistently underestimate the time-consuming nature of the programming task, but until they attempt the programming task, they don't realize what sort of robot behaviors are feasible to implement.

Other students more readily acknowledge the unknown nature of the programming task. Most fall back on previously learned approaches for dealing with complexity, as this student explains:

In addition to assembling part of the robot base, I have been working with Interactive C, writing some code but mostly pseudocode, and relying heavily on abstraction and wishful thinking.

This student has not gotten into the hard work of getting his robot to perform real behaviors with but one week before the contest. While the design techniques of abstraction and the use of pseudocode are often quite valuable, this student and the many others like him use these techniques in the place of experimentation. This leads them into trouble because they assume that their approaches will work, when often the problems of robot programming are of a different nature than the programming they are used to.

Ideal And Real Systems

Their abstractions then become a hindrance when they try to get the robot to actually perform a task.

Other students were more cognizant of the practicalities of the issue, realizing from the start that they need to get a firm grasp on their robot's potential capabilities. After describing a number of different strategic possibilities, one student wrote this statement after the first week of work:

However, [my teammates] and I realize that the only way to find out what strategy works best is to build hardware that is robust and is powerful enough to implement a lot of different strategies and then implement the actual strategies in software. Our immediate goal is to construct powerful hardware both electrical and mechanical and then write the software to control it and implement the different strategies.

This experimental approach to developing a robot's program is initially favored by fewer of the students, though all of the students in the project overcome their expectations that their robots will perform "omniscient" acts.

2.2. Understanding Sensing

Few participants in the class have had prior experience working with electronic sensors. When they are first introduced to sensors, either through the lecture-style presentation, or in the course notes, many students expect that sensors will provide clear and unambiguous information about the world. As one student explained:

We plan to build the sensors and motors first, so that I can start playing with the

Fred Martin

control software and writing subroutines so that we can abstract away the working of the sensors as much as possible.

This student speaks for many when he proposes the use of modular abstraction to deliver clean information about the robot's state to some higher level control program. However, there are many reasons why sensors don't work as straightforwardly as the students would like, including problems with noise and other failure modes. Students are then surprised when they attempt to program a functional behavior into their robots. As one explains:

I decided to write the wall-following function which was the example in the text. It turned out to be much more difficult than the text had led me to believe. First of all, I needed to figure out how much power went to the inside motor in a turn. This took more than a few hours to finally debug and figure out what kind of radius each power differential would give. Another thing I had to figure out was the thresholding and logic statements needed for two sensors, one at the front and one at the back. This thresholding problem took me more than a while to figure out, and in the process, I found errors in my logic statements... This method has not proved anything, because in its first incarnation, the robot was low on batteries... [the] present program hasn't been tested yet, because... we took the robot apart to strengthen each subsection, as in the wheel assemblies, and the subframe to connect them.

In the end, this student has concluded that the results of his tests were moot, since the robot had a low battery level when the tests were being done. Even though he didn't solve the particular problem at hand, though, it is clear from his narrative that he

Ideal And Real Systems

learned a great deal about the nature of the problem situation.

Here is another account of sensor troubles written by a participant who began systematic sensor experiments before the “crunch time” of the end of the project (and hence had time to write about it):

The sensors have plagued me with problems from the start. The photoresistor sensors work great and I think that we can rely on them for the polarized light sensors. However, I think that the polarized light filters are not very reliable in tests that we have been using. It seems that the photoresistor in the polarized light sensor can't tell the difference between facing the opposite goal and being far away from its own goal. I think the problem lies in ambient light reaching the photoresistor. I think the only way to solve this problem is better shielding, but I think that the ambient light problem is unsolvable unless the contest is [held] in a pitch black room.

The reflector sensors seem to work all right, but when we try to shield them from ambient light, we get random reflectance and therefore detection when we aren't supposed to. The problem seems to be solved when we place the sensor inside my sweater which is very “bumpy” and keeps light from randomly reflecting off of things. We are going to try to fix this problem this week because our strategy really depends on them.

These two cases are unusual only in that the respective work took place early in the course of the design project. They are quite typical, however, of what nearly all of the students encounter when they engage in the actual programming task. Students then discover all sorts of interrelations and complexities that arise, aside from implementation

Fred Martin

issues, that make it difficult to abstract sensor data into clean information upon which control strategies can be based. They realize that sensor data are erratic; that there are dependencies on hard-to-quantify properties of the mechanical system; and that the ultimate reliability of the sensor data depends on how one solves the control problem. For example, here a student finds the solution to achieving a good edge-following behavior lies in accomplishing several changes:

When we first tested the robot's ability to detect a green/white boundary, the robot had difficulties. After some software changes (by [my partner]) and mechanical changes by me of placing the sensors even closer to the ground and also placing shields around the sensors, we have no problems detecting the boundary.

When building their control algorithms, students had a tendency to establish hard-coded thresholds for interpreting the meaning of sensor data. In *Robo-Pong*, two sensor varieties were particularly problematic in this regard: motor current sensing, which determined if a robot's movement was impeded (causing its motors to stall and hence draw more current) and light sensing (for determining on which side of the playing table the robot was located).

The trouble with motor current sensing was that the numerical value indicating a stalled motor would change as a function of the voltage of the motor's battery. When the battery voltage fell, as the battery gradually discharged with use, the current sensor would return higher values—and students' programs would interpret the higher values as an indication of a stalled motor, even though it was not.

Several teams of students failed to adequately deal with this problem and created robots that acted as if they were stuck when, in fact, they were just driving uphill. This

Ideal And Real Systems

occurred because uphill driving would necessarily cause additional load on the motors, which the robots' programs would interpret as the case where the robot was indeed stuck. In the main contest performance, one robot in particular suffered an amusing yet incapacitating failure mode of this type. It would repeatedly drive forward, stop, and back up as its program interpreted the motor current sensors as indicating that the robot was stuck. The robot seemed to be battling an invisible enemy as it tried again and again to collect the balls in its trough, each time backing up after advancing a few steps.

Students in *Robo-Cup* were warned of this problem and some concluded that the motor current sensing was simply too unreliable to be a part of their design. As one student explained:

I wrote servo-like routines to monitor the clamp's position, and attach or release it as required. The original plan was to use the motor force sensing to determine if the motor was stalled, and control its motion like that. The force sensing, it turns out, is very unreliable, so we chose to install a potentiometer [a rotational position sensor] on the axle instead, and use that to keep track of position.

This student has performed an analysis that this sensor was too erratic to be trusted, but most did not discover the sensor's failure mode. Students simply did not anticipate the sensor's fundamental unreliability.

The light sensors used in *Robo-Pong*, which were used by students to detect on which side of the playing field the robot was located, were problematic in that they relied on room lighting to illuminate the table playing surface. Hence the values registered by sensors—of the amount light reflecting off of the playing surface—were dependent upon the amount of ambient light in the room.

Fred Martin

We as organizers were aware of this situation when we designed the contest and chose sensors for the robot-building kits, but we underestimated the impact on students' robots that resulted from changing the light levels for the contest performance. Anticipating that the lighting conditions would be different on the eve of the contest than they were in the development laboratory (since we intended to use camera lights), we had informed students that they should either shield their sensors from ambient light and provide a local source of illumination (e.g., a light emitting diode or flashlight bulb), or write calibration software that would take into account the level of ambient lighting.

However, we failed to provide a readily accessible way for students to try different lighting conditions during robot development, and the camera lights we used were particularly harsh, causing wide fluctuations in light levels even from one side of the table to the other. It was an unfortunate situation as a number of otherwise competent robots became unreliable in the face of the extreme lighting conditions.

Even after making changes to ameliorate the problem in the subsequent contest year, students continued to have similar difficulties dealing with the sensor calibration issue.³ Its implications were underestimated and the concept seemed unfamiliar to them.

2.3. Models of Control

The overall strategies that students used to control their robots lay in a spectrum between two categories, which I shall call *reactive* strategies and *algorithmic* strategies. In addition, each of these strategies is built from two lower-level methods, *negative feedback* and *open-loop* approaches. Analysis of the various approaches that students take toward implementing an overall strategy to control their robots reveals interesting biases, as was the case in analyzing students' approaches to understanding and deploying sen-

sors.

These descriptions that categorize the students' robots were created in an analysis after the fact of the students' work on them; students were not aware of these categories during the course of their projects. I believe that students would recognize these distinctions if asked, however.

2.3.1. The Higher Level: Reactive and Algorithmic Control

The issue of control manifests itself in at least two aspects of the Robot Design project: in the development of the robot's higher-level strategy from a conceptual standpoint, and in the actual programming of that strategy into the machine through the process of writing computer code. In the conceptual area, the *algorithmic* control method is by far dominant over the *reactive*.

The algorithmic method is characterized by a program that dictates a series of actions to be taken. (This is in contrast to the reactive approach, discussed following, in which a program chooses a path of action based on situated sensory input.) For example, here is an algorithmic main program loop from a student's solution to *Robo-Pong*:⁴

```
main()
{
    start_machine(); /*starts the machine up when*/
                    /*the light is on*/
    rotate_down();
    grab_balls();   /*go into our grab balls routine*/
}
```

Fred Martin

```

    sleep(2.0);          /*wait two seconds*/

    other_side();

    finish();           /*block other machine or */

                        /*knock more balls over?*/

}

```

The code waits for the starting lamp to turn on (`start_machine`), then executes a routine to turn the robot downward (`rotate_down`), executes a routine to sweep across the ball trough (`grab_balls`), waits for two seconds, and then drives to the other robot's side of the table (`other_side`). This program solves the *Robo-Pong* contest by executing a specific series of actions.

Here is another example of the same approach, albeit slightly more complex, also for solving *Robo-Pong*. The names that the student has given to the subroutines of his program are fairly self-explanatory as to what action each subroutine performs:

```

game()
{
    start();

    Turn_to_Uphill();

    Go_Up_and_Orient_Plateau();

    DoorOpen();

    WalkPlateau();

    DoorClose();

    JiggleLeft();
}

```

Ideal And Real Systems

```

DoorOpen();
FollowRightWall();
DoorClose();
JiggleLeft();
DoorOpen();
FollowRightWall();
DoorClose();
JiggleLeft();
FollowRightWall();
AllOff();
}

```

Code written using the same algorithmic method can be found for *Robo-Cup* robots. Here is an example of such a main routine:

```

starting_routine()
{
/* drive forward full speed */
drive(7);

/* wait until sense edge */
while(abs(ana(reflectance0)-white0)<40) {}

/* drive a little further */

```

Fred Martin

```
sleep(distance(2.0));  
alloff();  
  
/* turn a little */  
pivot_on(7);  
msleep(80L);  
pivot_off();  
  
/* drive until front bumper triggers */  
while(!(digital(front_bumper)))  
drive(7);msleep(20L);  
drive(0);  
  
collect_balls(3);  
goto_goal();  
goto_button();  
  
collect_balls(3);  
goto_goal();  
goto_button();  
  
catch_ball();  
goto_goal();  
goto_button();
```

Ideal And Real Systems

```
    return;  
}
```

As illustrated, the algorithmic control methodology consists of a list of instructions to be followed in order to accomplish the intended task. Each instruction may consist of a set of sub-actions, but the overall principle is to decompose the task into a sequence of activities to be followed, much like one might construct an algorithm to sort items in an array or compute a statistical quantity.

The trouble with the algorithmic approach is that there is no recovery path if things do not proceed according to the plan. Not only is there no way to recover from unexpected circumstances, but there simply is no provision for detecting that something out of the ordinary has occurred. These solutions have a problem that is reminiscent of comical factory scenes in which the machinery continues to plug away at an assembly process that has gone completely awry.

Students often deceive themselves as to the reliability of their algorithmic solutions. Suppose each component of an algorithmic solution has a 90% likelihood of working properly on any given occasion. One might think that the overall solution would have a similarly high probability, but this is not the case, since the probabilities multiply together with the overall result decreasing in likelihood with each step. If the algorithm has six independent steps, then the overall probability of proper functioning is only 53% (0.9 raised to the sixth power is approximately 0.53)—not nearly as good as the 90% chance that each individual step has of working properly. During testing, an algorithmic solution might require a gentle prod or correction here and there, and students don't realize

Fred Martin

that their machine actually needs this sort of help a significant portion of the time.

The reactive methodology, on the other hand, is characterized by actions that are triggered through constant re-evaluations of external conditions (i.e., sensor readings) or internal conditions (program execution status). While the algorithmic method does make use of external stimuli, the reactive method is more *driven* by this data, rather than by using it as part of a predetermined activity sequence.

There were no purely reactive robots in any of the contests; instead, some students combined elements of a reactive strategy into an overall algorithmic framework. An example is the robot *Crazy Train*, which was the champion of the *Robo-Pong* contest. The robot was a collector-style machine that scooped balls into its body.

Crazy Train worked as follows. As the round began, it took a reading from its inclination sensors to determine its initial bearing. If it determined that it was pointed toward the top of the hill, it would drive forward until it crossed the center plateau; in the process, it was likely to knock a center ball onto the opponent's territory (thus gaining an early advantage—insurance in case something went wrong later in the round). If it was not aimed uphill, or, after having executed the initial upward movement, it would drive to its own ball trough and collect balls into its body. After making one sweep of the trough, it would drive onto its opponent's side of the table, delivering the balls it was carrying onto the opponent's side. In addition, when ten seconds remained in the round, *Crazy Train* checked to see which side of the table it was presently on. If for some reason it was still on its own side of the table, it would execute a "panic" routine which would attempt to drive onto the opponent's side before the round ended.

There are two aspects of *Crazy Train's* program that characterize the reactive

Ideal And Real Systems

method. Firstly, *Crazy Train* had an unusual response to sensing its orientation at the start of each round. Depending on the orientation, the robot choose whether to immediately knock a ball over the top—a potentially risky maneuver since the robot might get “lost” or entangled with the opponent—or the safer maneuver of traveling to its trough to collect balls. It chose to go for the early lead by knocking over a center ball only if it is was efficient maneuver: the case when the robot was already aimed toward the center plateau. In this fashion *Crazy Train* reacted to an external condition and choose an appropriate response.

The other reactive feature of *Crazy Train's* program is its panic behavior when the contest round was about to end. Here the main program, albeit an algorithmic one, is interrupted by another behavior which is triggered by a change in internal condition—a timer keeping track of remaining contest time. If necessary, the panic behavior attempts to drive onto the opponent's side (if the sensor registers that the robot is already on the opponent's side, which should be the case if the algorithmic task has been completed successfully, then no additional action is needed). The students who created *Crazy Train* implemented the panic behavior by exploiting Interactive C's multitasking capability. Their program had both the algorithmic behavior and the panic behavior as independent program tasks; at the appropriate time, the algorithmic task was terminated and the panic task was initiated (a third program task was used to coordinate this activity).

Crazy Train is perhaps the most dramatic example showing the usefulness of reactive program strategy, and, not too surprisingly, it was an overall contest winner. Its success can be attributed to a combination of its reliable and effective ball-gathering algorithmic strategy bolstered by useful reactive behaviors: there were a few game rounds in which the algorithmic strategy failed but the reactive behaviors delivered a winning perfor-

Fred Martin

mance. It also is representative of the extent to which reactive behaviors were used at all; that is, where reactive methods were used, they were simplistic, though sometimes effective, responses to a limited number of potential situations.

2.3.2. The Lower Level: Negative Feedback and Open-Loop Methods

The issue of reactive versus algorithmic control, as it applies to the macro level of overall robot strategy, has an analog at the micro level (the mechanism by which the strategy is actually carried out). The micro level consists of the low-level methods for driving the robot's motors to accomplish an intended action.

For example, the macro tasks of collecting and delivering balls in both *Robo-Pong* and *Robo-Cup* can be decomposed into micro- or sub-tasks such as climbing uphill or downhill, driving along the retaining wall of the playing field, or driving along a light-dark boundary painted on the playing field floor. The contests were specifically designed to be decomposable into subtasks like these—ones that are feasible to be solved with the technology provided in the robot kit.

I distinguish two low-level control methods that were implemented in the robots: *negative feedback* and *open-loop control*. Most robots used a mixture of these two methods rather than one or the other exclusively.

In the negative feedback method, a robot responds to a situation with a small corrective action, which is intended to reduce the difference between the current state and a goal state. This small maneuver is repeated; through repetitive application, the robot achieves the overall action desired by its designer. For example, a robot might follow along the edge of a wall with the use of a sensor that measures the distance to the wall, repeatedly turning to move toward the wall if it senses that it's too far away, or turning

Ideal And Real Systems

to move away from the wall if it's too close.

In the open-loop method, the robot responds to a situation with a single action which the designers presume will bring it to a new state with respect to its surroundings. A typical action would be a predetermined, timed motor movement, usually lasting one or more seconds. For example, the robot might turn its motors on for a period of two seconds (this value would be experimentally determined) in order to pivot ninety degrees and thereby negotiate out of a corner.

Few of the robots' activities can be considered open loop in the formal sense because the open loop-like maneuvers are part of a larger robot strategy that generally involves sensor input and hence is not truly open loop. However, if a robot takes an action that does not accomplish the desired result, and the control algorithm cannot recover gracefully from this circumstance (nor make any effort to detect it), the action is likely to be representative of open-loop thinking.

An example will help make these ideas more clear. *Groucho*, a *Robo-Pong* robot (pictured in Figure 1), employed the following strategy. It would drive into its trough at the beginning of the round and then execute a series of motions that would make it drive in a rectangular pattern, scooping balls from its trough and depositing them onto the opponent's territory. *Groucho* used an overall algorithmic strategy, repetitively performing the sequence of these steps, as illustrated in Figure 2.

In implementing this strategy, however, the students who built *Groucho* used mixed techniques of feedback loops and open-loop control. At points 2 and 7, when negotiating corners, they used feedback from the playing field walls to do so: it would hit the wall, back up, make a small rotation, drive forward, hit the wall, and try again. Typically the robot would strike the wall three to five times until it rotated sufficiently.

Fred Martin

Insert FIGURE 1

At points 3 and 5, however, the robot executed timed movements to accomplish the rotations. The designers had experimentally determined how much of a rotational movement, measured in fractions of a second, would be required to perform the desired turn, and then hard-coded these timing constants into their program structure.

The question arises as to why the designers of this particular robot chose to implement a feedback-controlled turn during some points of their robot's path and open-loop-controlled turns at others. There is a clue to the explanation contained in the source code written for the robot. As mentioned, in the trough area, the students used feedback from touch contact to negotiate turns, but in the plateau area, they used timed turns rather than feedback from the center dividing line. It turns out, however, that the students attempted to base the plateau turns on feedback from the dividing line, but at some point commented out the code to do this, replacing it with a simple timed turn. Here is the relevant code excerpt from their program. The line bracketed with `/*` and `*/` is the one that the students commented out; the subsequent line, `left(100,1.);`, implements the timed turn that replaced it.

```
printf("Crossed the border.\n");  
  
beep();beep();  
  
time=seconds()+1.1;
```

Ideal And Real Systems

```

/* while ((left_reflectance!=side)&&(seconds(<time))
    {bk(0);bk(1);fd(2);fd(3);} */
left(100,1.);
ao();
printf("On the Line...\n");

```

Insert FIGURE 2

It can be presumed that some kind of difficulty or unreliability was encountered when using the reflectance sensor to determine when the robot had turned enough, so that the students substituted the open-loop turn movement instead. This robot's mechanics were sufficiently well-designed and reliable that the robot's performance through the turn remained consistent through the contest performance, but this is not typically the case.

The example of *Groucho* brings out a tension between the negative feedback technique, which ultimately can be more reliable, and the open loop technique, which is often quicker to implement and can result in faster performances, but is more subject to failures. Often students consider the open-loop methods more reliable since they are simpler to implement and seem to work adequately, but many students were unaware of problems that would result from hard-coding timing constants into their movement programs. In the following two excerpts, students comment explicitly on this matter:

We decided to simplify our strategy, making our robot more reliable and easier to build. We now plan to have our robot aimed at the dispenser at the outset of the

Fred Martin

contest. The robot will then move forward until it senses that it has crossed the white/green boundary, using an infrared reflectance sensor. The robot will then turn and press the button repeatedly, catching and shooting each ball into the net. *This strategy involves much open loop control, but greatly simplifies our control system, making the robot more reliable.* (Emphasis added.)

I discussed with my teammates that if we're going to be a fast machine, then we'll have to implement a lot of open-loop [controls] interleaved with closed-loop feedback. Otherwise if we used mostly closed-loop [methods] to "feel" our way around the playing field, we'd be as slow as our opponents.

These students were conscious of the trade-offs involved, but others were not. Many students used open-loop movements based on timed actions; robots built from these constructs faced problems from a number of sources. Most important was the level of charge in the battery powering the motors. Since the durations of the open-loop movements were experimentally determined, they were highly dependent upon battery performance.

Insert FIGURE 3

Robots were powered with lead acid rechargeable batteries, which have a characteristic discharge curve as shown in Figure 3. As the battery is used, its voltage (which determines the amount of power delivered to the motors) gradually decreases. Often this deterioration was not immediately noticeable, so students were not necessarily aware of the situation as they were developing their programs. Finally the battery would reach a

Ideal And Real Systems

point, the end of its usable life, when the voltage would drop off rapidly and the battery would be obviously “dead.” However, during the usable period there would be a significant difference between the initial voltage and final voltage levels. (Some other types of batteries, such as nickel cadmium, have discharge curves in which the voltage level remains nearly constant for the bulk of the batteries’ usage, until the level drops off sharply, rendering the battery suddenly useless. Use of these batteries would have made the discharge effect less pronounced.)

Most students only realized that the algorithms they had created to solve the contest were dependent upon battery level when they would swap a partially discharged battery for a fully charged one, and discover that their program no longer worked correctly. As mentioned earlier, this realization did not occur until quite late in the robot’s development—when there were only a few days or even hours left before the contest—and hence it was too late for them to make a substantive change in the robot’s strategy (that is, substituting feedback-based movements for open loop ones). Students would deal with the situation by doing final program development—i.e., tweaking of timing constants—with batteries as fully charged as possible.

The degree to which this problem would manifest itself in the students’ designs was largely a function of the gear ratio (that is, ratio between motor rotational speed and final drive wheel rotational speed) used in the robots’ mechanics. If the gear ratio was such that the motor was driven in a “comfortable” portion of its power range, a slight change in battery level would not have a drastic effect on the performance of the motor. On the other hand, if the gear ratio caused a high amount of drag on the motor, slight changes in battery level would have a large effect on motor performance.

We as organizers only recognized this situation in retrospect, and hence were as con-

Fred Martin

fused as the students as to why some robots seemed to have little difficulty in performing reliably (at least in this regard) while others were quite troublesome. We were more savvy of these control issues when running *Robo-Cup* than *Robo-Pong*. In an attempt to encourage students to use feedback-based control rather than open-loop control, I wrote an additional chapter of the course notes for the *Robo-Cup* students that explained the differences and trade-offs between open-loop and feedback-based control. I also discussed the need for calibration of sensor values to local conditions.

A number of students became fixated on using feedback control in surprising ways, however, spending a considerable portion of development time creating a feedback controller to make their robot able to drive in a straight line. Here is how one student explains his system:

The robot is now able to drive in a straight line thanks to its optical shaft encoders. The software continually samples both left and right sensors and adjusts the exact power level to the motors to compensate for any fluctuations in the motion of the robot. The algorithm itself is a combination of differential analysis and Newton's method, along with an "adjustable window" of correction. Simply stated, analyzing differentials gives a reasonable algorithm for adjusting the power levels of the motors, and the adjustable window minimizes excessive wobbling. This algorithm gives us as much accuracy as the resolution of the shaft encoders permits, while keeping wobbling reasonably low.

The ability to drive perfectly straight, however, often does little to help a robot in its overall ability to solve the contest task. While the activity of driving straight is based on negative feedback control, a strategy that employed this ability in a central way should

Ideal And Real Systems

be considered open-loop at the next higher level, as the robot would be performing a task with little feedback from the crucial environmental features! So these students' belief that they were using the preferable feedback control was misguided.

Taken as a whole, the collection of biases revealed in students' thinking suggests important misconceptions and misunderstandings about what are effective ways to build reliable real-world systems.

3. Analysis and Conclusions

The examples in this paper illustrate that students who participate in the Robot Design course have a variety of preconceptions about systems and control. These ideas are formed by experiences in the traditional academic curriculum, and warrant examination specifically because they are not particularly effective when applied to the Robot Design task.

In the section entitled *Robotic Control*, we saw how many students have trouble seeing the contest task from a robot-centric perspective, and instead imagine the task from their own omniscient perspective. This naiveté was tempered when they tried to put their ideas into being and realized that the robot's point of view was very different from their own.

With few exceptions, all of the robots created for *Robo-Pong* and *Robo-Cup* used fundamentally algorithmic solutions. This fact is not surprising; there are at least two factors which would strongly encourage the formulation of algorithmic solutions. One of these is the nature of the contests themselves, which require a series of activities to take place in a short period of time. A robot that wandered about as it waited to be guided into action by sensory stimuli would not be efficient; the typical winning robot employs

Fred Martin

a fast, reliable, and effective algorithmic strategy. If they're not interfered with, these robots successfully perform their task on nearly every run.

The other factor encouraging algorithmic solutions is the Interactive C programming language, which is fundamentally procedural. While it is a general-purpose programming language, and can in principle support the construction of a variety of control methodologies, as a procedural language it encourages students to create procedural control structures. Other language approaches, such as rule-based languages, or control architectures like Brooks' *subsumption language* (Brooks, 1986) would facilitate reactive control strategies.

One feature of Interactive C, however, did encourage reactive control: the multi-tasking capability. Indeed, this feature was used by students to implement reactive controls, as was discussed in the *Crazy Train* robot design. This evidence points to the effect that the programming language has on students control ideas; extensions or revisions of the programming language could encourage students to think differently about control.

While it is then not unexpected that students create largely algorithmic robots, what remains surprising is how poorly these systems perform with respect to the students' own expectations. Nearly all of the students who participate in the class are genuinely surprised by the difficulty of getting their robot to work reliably. They blame performance problems on failures of particular components of their systems, rather than re-evaluating their overall approach to control.

The students' control ideas come from those presented in their university courses. At MIT, examples are found in the introductory Computer Science course, *Structure and Interpretation of Computer Programs* (course number 6.001), and the *Software Engineering Laboratory* course (course number 6.170). Among the central ideas developed in 6.001 is

Ideal And Real Systems

the concept of *abstraction*: that by encapsulating messy implementation detail into conceptual “black boxes,” complex systems can be built from components with relatively clear functionality. Abstraction is a way of managing complexity—a way to keep minutia in check, and to create large systems with clearly understood parts. As stated in the text of the course (Abelson & Sussman, 1985):

In our study of program design, we have seen that expert programmers control the complexity of their designs by using the same general techniques used by designers of all complex systems. They combine primitive elements to form compound objects, they abstract compound objects to form higher-level building blocks, and they preserve modularity by adopting appropriate large-scale views of system structure.⁵

The Software Engineering course expands and fleshes out this principle, teaching programming techniques like procedural and data abstraction through extended programming projects. The course makes a point of teaching how to write programs in a modular fashion, test code modules independently, and then integrate them into a complete system. Typical final projects are the design and implementation of a text editor or a computerized Othello game.

While these projects are ideal for the goals of the course—teaching abstraction and modularity in the architecture of large computer programs—they promulgate the mindset that large systems are made from parts that are completely understandable and formally specifiable. In both of these examples, as in many others, the computer program consists of precisely formalizable data structures and algorithms to operate upon this known data to generate known results. Indeed, a large portion of the Software

Fred Martin

Engineering course is dedicated to methodology of testing with the intent of proving that a given program module will yield correct results when presented with data that satisfies particular conditions.

Much of the engineering curriculum is based on modern system theory: mathematical methods for understanding algorithms and systems that take particular inputs and yield particular outputs. Dynamical systems analysis, in which system state is represented by a state vector, and signal-processing theory based on transfer functions are leading examples. These domains of theory deal with systems that are perfectly represented in the mathematical models that students learn to manipulate.

Of course the value of such engineering knowledge is precisely that it allows us to construct systems that are indeed controlled to extreme degrees of precision. The great engineering successes are based on our ability to understand, model, analyze, and precisely control the world around us. But not all large systems are controllable by these means. As discussed by Ferguson, recent work on chaotic systems has challenged the assumptions of those working on automated traffic control systems:

For engineers, a central discovery in the formal study of chaos is that a tiny change in the initial conditions of a dynamic system can result in a major unexpected departure from the calculated final conditions. It was long believed that a highly complex system, such as all automobile traffic in the United States, is in principle fully predictable and thus controllable. "Chaos" has proved this belief wrong. The idea that roads will be safe only when all cars are guided automatically by a control system is a typical but dangerous conceit of engineers who believe that full control of the physical world is possible.⁶

Ideal And Real Systems

Students often believe that sensors and the control problem in general are simple enough to be solved in a closed-form manner. Some have attempted to build environments for simulating the performance their robot as if it were a character in a videogame system. This raises the issue of the role of simulation in understanding and representing complex systems. For some domains (e.g., VLSI design) simulation is a powerful and accurate technique for developing and testing complex systems. For others (e.g., structural engineering), difficult issues of determining the applicability of a simulated model to the actual artifact affect the reliability of the simulation in profound ways. An additional complicating factor is that many simulation packages are developed by theoretical rather than practicing engineers, raising the question that the practicing engineer must trust the output of the simulation without necessarily knowing the founding assumptions upon which it is based. As Henry Petroski quotes a Canadian structural engineer on this point:

Because structural analysis and detailing programs are complex, the profession as a whole will use programs written by a few. These few will come from the ranks of the structural “analysts”... and not from the structural “designers.” Generally speaking, it is difficult to envision a mechanism for ensuring that the products of such a person will display the experience and intuition of a competent designer.⁷

The reliance on simulation as an engineering technique is a consequence of the assumption that complete control of the physical world can be attained. While simulations can reveal problems before they develop into serious engineering failures, over-reliance on the trustworthiness of simulations can lead to disasters. Contemporary examples of

Fred Martin

failures due to inadequacies in simulation abound; here are two striking ones from Peter Neumann's column in the *Communications of the Association for Computing Machinery* periodical (Neumann, 1993):

On April 1, 1991, a Titan 4 upgraded rocket booster (SRB) blew up on the test-stand at Edwards Air Force Base. The program director noted that extensive 3-D computer simulations of the motor's firing dynamics did not reveal subtle factors that apparently contributed to failure. He added that full-scale testing was essential precisely because computer analyses cannot accurately predict all nuances of the rocket motor dynamics. (See *Aviation Week*, May 27, 1991 and Henry Spencer in *SEN 16*, 4, Oct. 1991.)

The collapse of the Hartford Civic Center Coliseum 2.4-acre roof under heavy ice and snow on January 18, 1978 apparently resulted from the wrong model being selected for beam connection in the simulation program. *After* the collapse, the program was rerun with the correct model—and the results were precisely what occurred. (Noted by Richard S. D'Ippolito in *SEN 11*, 5, Oct. 1986.)

If engineering students gain early hands-on experience with the complexity of electrical, mechanical, structural, and software systems, they will have more respect for the sorts of pitfalls that can be expected later when working on real projects, as in the case of the Civic Center cited above. With project experience like that acquired in the Robot Design course, students have the chance to learn the limitations of traditional control and analysis, and gain the experience that is needed to be an engineer with a mindset that is grounded in reality.

Acknowledgments

This paper is based on a chapter of my recently completed Ph.D. dissertation, “Circuits to Control: Learning Engineering by Designing LEGO Robots.” My thesis advisor, Edith Ackermann, and the members of my doctoral committee, Seymour Papert, Donald Schön, and Pattie Maes, provided much-welcomed advice, counterpoint, and support during the process of developing these ideas. I collaborated closely with Randy Sargent and Pankaj Oberoi when developing the MIT 6.270 LEGO Robot Design Competition. Mitchel Resnick, Yasmin Kafai, and Michele Evard provided helpful and timely feed-back on earlier drafts of this paper. The work described in the paper was done at the MIT Media Laboratory and was supported by grants from the National Science Foundation (Grant 9153719-MDR), the Nintendo Corporation, and the LEGO Group. The ideas presented in this paper do not necessarily represent the views of these funding agencies.

References

- Abelson, H. & Sussman, G. J. (1985). *Structure and Interpretation of Computer Programs*. The MIT Press, Cambridge, Massachusetts.
- Brooks, R. A. (1986). A robust layered control system for a mobile robot. *IEEE Journal of Robotics and Automation*, RA(2), 14–23.
- Bucciarelli, L. L. (1988). Engineering design process. In Dubinskas, F. A. (Ed.), *Making Time: Ethnographies of High-Technology Organizations*, chap. 3, pp. 92–122. Temple University Press, Philadelphia.

Fred Martin

Ferguson, E. S. (1992). *Engineering and the Mind's Eye*. The MIT Press, Cambridge, Massachusetts.

Neumann, P. G. (1993). Inside risks: Modeling and simulation. *Communications of the ACM*, 36(4), 124.

Papert, S. (1986). Constructionism: A new opportunity for elementary science education. Proposal to the National Science Foundation. MIT Media Laboratory.

Petroski, H. (1992). *To Engineer is Human: The Role of Failure in Successful Design*, Vintage Books, New York.

Roberts, E. & Berlin, S. (1987). Computers and the strategic defense initiative. In Bellin, D., & Chapman, G. (Eds.), *Computers in Battle: Will They Work?*, pp. 149–170. Harcourt Brace Jovanovich, Orlando, Florida.

Vincenti, W. G. (1990). *What Engineers Know and How They Know It: Analytical Studies from Aeronautical History*. John Hopkins Studies in the History of Technology. The John Hopkins University Press, Baltimore and London.

Ideal And Real Systems


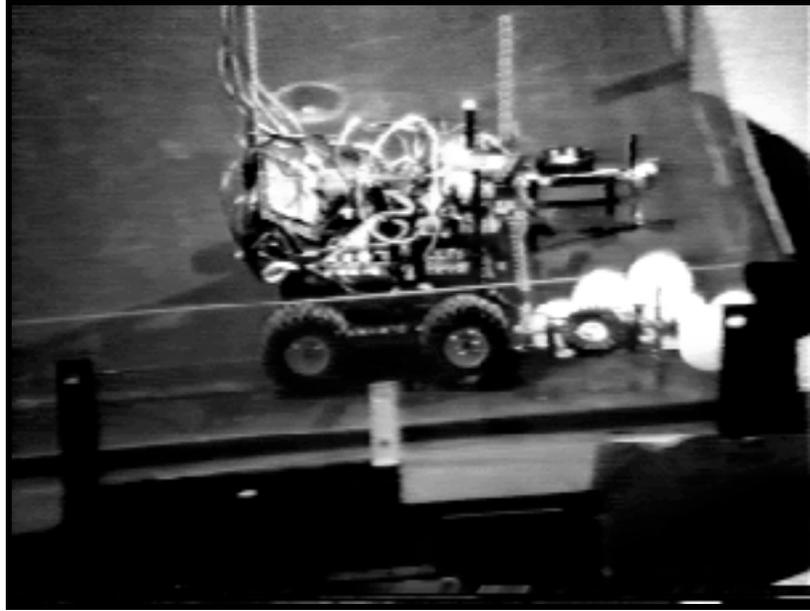


FIGURE 1. Photograph of *Groucho*.

Fred Martin

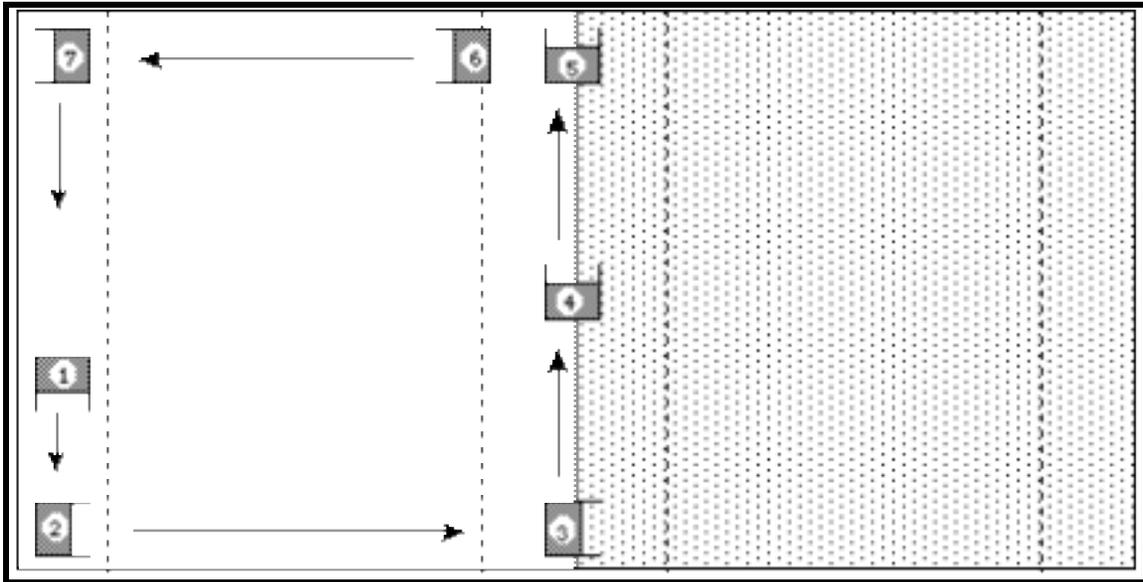

1. Robot drives along trough, scooping balls into its grasp.
2. Robot negotiates corner and turns uphill.
3. Robot stops at dividing edge, allowing balls to fall onto opponent's side.
4. Robot drives along edge to opposite side of the table.
5. Robot hits opposite side; turns to drive downhill.
6. Robot drives downhill.
7. Robot hits bottom wall and negotiates corner; continues pattern in step 1.

FIGURE 2. *Groucho's* strategy as played in *Robo-Pong* contest.

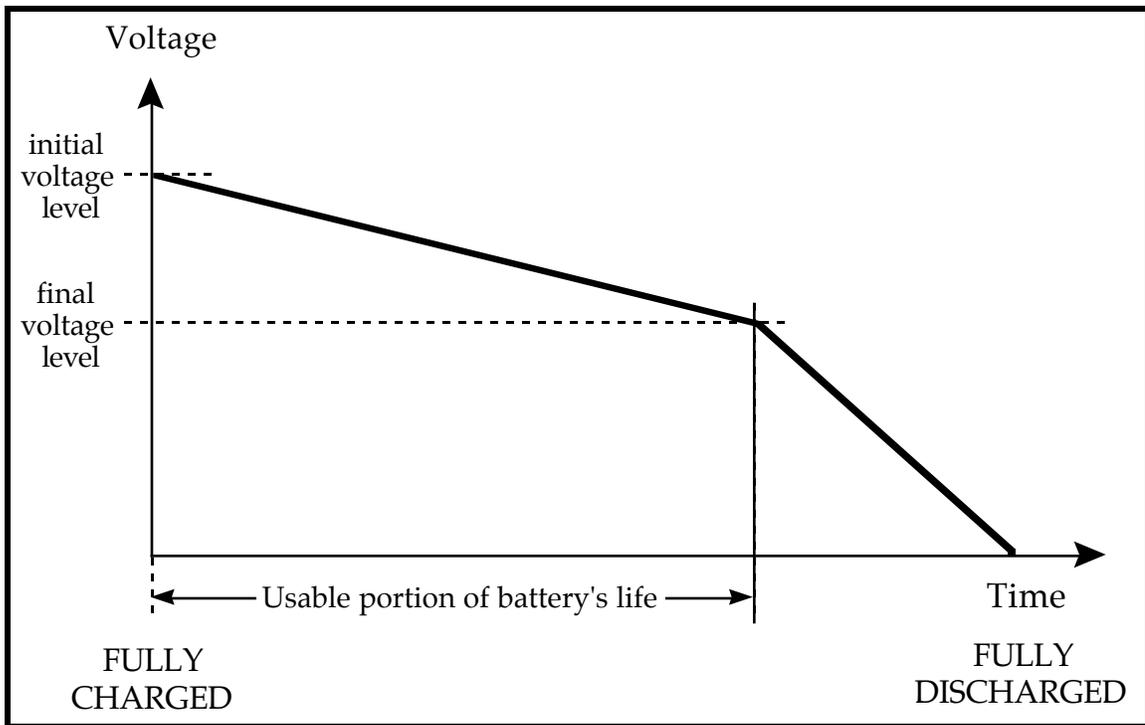


FIGURE 3. Idealized lead-acid cell discharge curve.

Fred Martin

FIGURE 1. Photograph of *Groucho*.

1. Robot drives along trough, scooping balls into its grasp.
2. Robot negotiates corner and turns uphill.
3. Robot stops at dividing edge, allowing balls to fall onto opponent's side.
4. Robot drives along edge to opposite side of the table.
5. Robot hits opposite side; turns to drive downhill.
6. Robot drives downhill.
7. Robot hits bottom wall and negotiates corner; continues pattern in step 1.

FIGURE 2. *Groucho's* strategy as played in *Robo-Pong* contest.

FIGURE 3. Idealized lead-acid cell discharge curve.

Ideal And Real Systems

¹ The LEGO Robot Design project was created by this author in collaboration with Pankaj Oberoi and Randy Sargent, two fellow MIT students.

² This and other student quotations are taken from students' weekly written design reports.

³ This situation led us to propose to a number of changes in the next year, *Robo-Cup*. First, we provided a light sensor that incorporated its own light transmitter, so that it would be substantially easier for students to deploy light sensors that were well-shielded from ambient light. Second, we incorporated a diffuse lighting fixture into the contest playing field itself, so that lighting conditions would not change drastically from development to performance situations. Also, we modified the programming environment to make it easier for students to construct sensor calibration routines: we made it possible for calibration settings to be "remembered" throughout multiple performance runs.

⁴ In this example and the other code samples presented in this paper, the code comments are the students' original work.

⁵ *Structure and Interpretation of Computer Programs*, page 293.

⁶ *Engineering and the Mind's Eye*, page 172.

⁷ *To Engineer is Human*, page 201.