
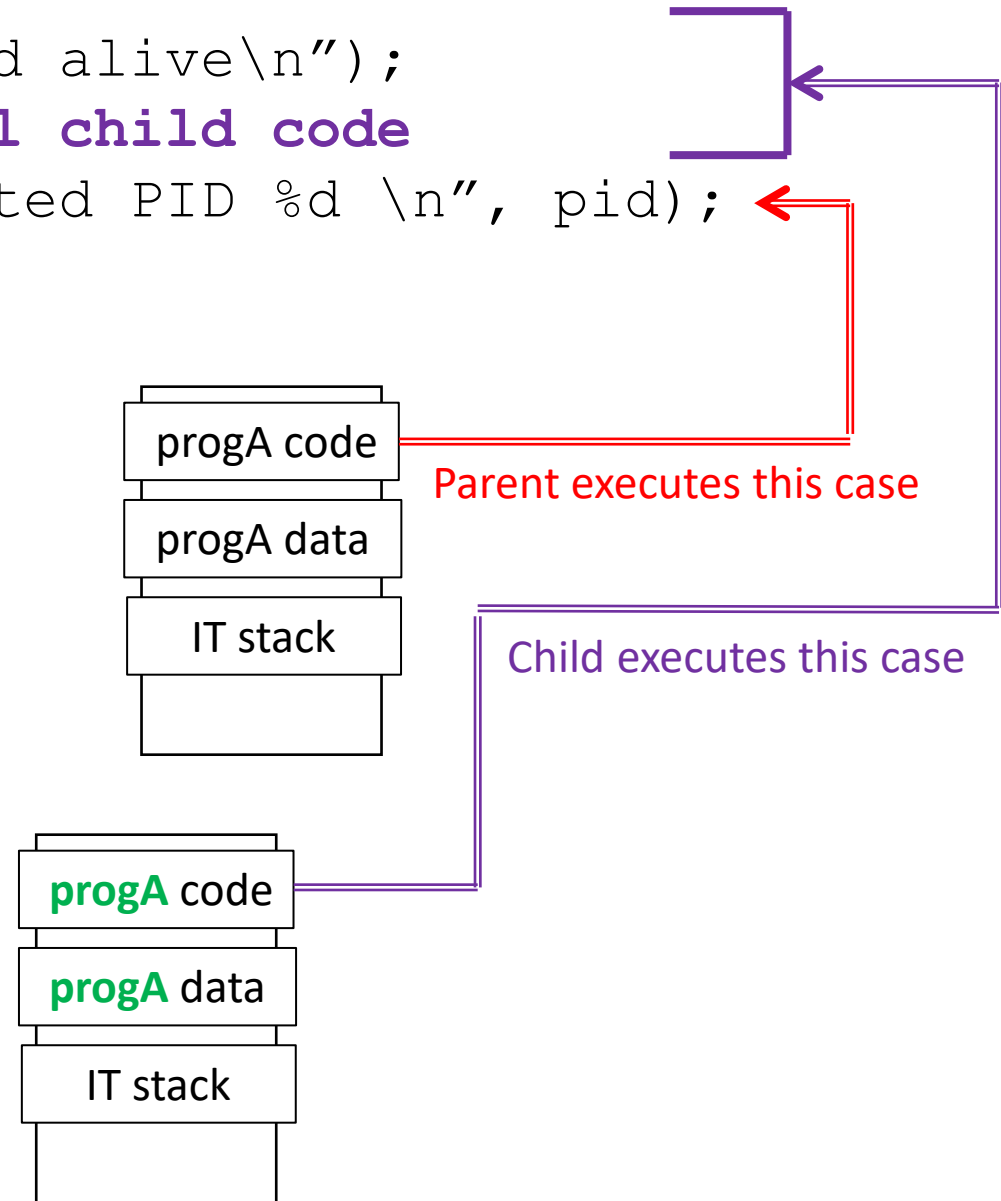


```

switch (int pid = fork()) {
    case -1: perror("fork failed ");
             exit(1);
    case 0:  printf("child alive\n");
             // additional child code
    default: printf("created PID %d \n", pid);
} // end switch

```

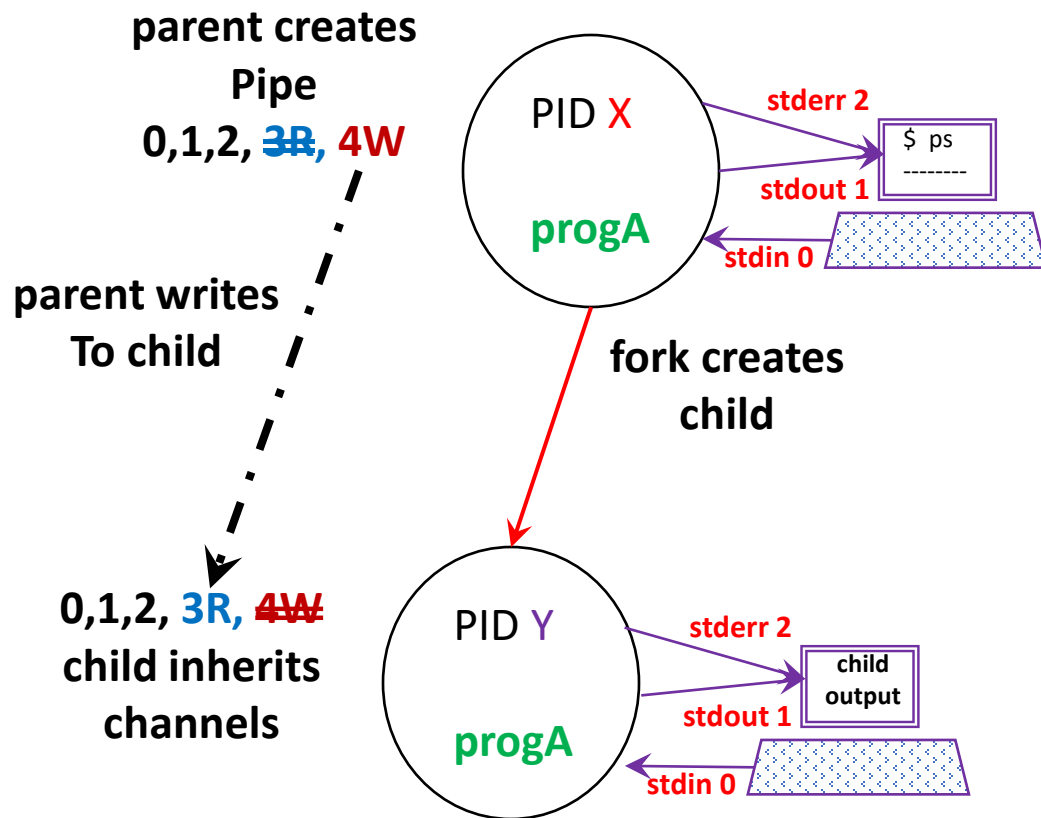

```
read (channel_number, byte_buffer, numer_of_bytes_to_transfer);  
write (channel_number, byte_buffer, numer_of_bytes_to_transfer);
```

```
int my_channel;  
char buf[100];  
sprintf (buf, "this is a message from PID %d\n", getpid());  
  
write(my_channel, buf, strlen(buf));
```